

SPEEDY Emergency Exit Sign Box



Specification: Slim self-contained emergency LED exit sign box. Viewing distance 34m. Constant emergency light (70lm) for 3 hours. Low stand-by power consumption. Self-test versions and remote controls available. Lithium battery integrated. Maintained or non-maintained configurations. Suitable for indoor applications such as educational and offices buildings.

Key Features

- Test button integrated
- Viewing distance 34m
- Fast battery re-charge (8 hrs)*
- "UP" arrow included
- Low stand-by power consumption (0.5 W)**
- Remote control available

* First battery charge takes up to 16 hours

** Non-maintained mode only




* Self-test only available on AST and PST versions

** 5 Year Warranty only applicable to MT, AST and PST versions

SPEEDY Emergency Exit Sign Box

| Part number | Description | Testing facility | Remote control part number * | Operating temperature | Net weight |
|-------------|---|------------------------------|------------------------------|-----------------------|------------|
| BXA34-SD | Exit sign box 1.5W 34m viewing distance Standard | - | - | 0°C ~ 40°C | 1.15 kg |
| BXA34-AST | Exit sign box 1.5W 34m viewing distance Self Test AST | Advance Self-Test (AST) | ARC | | |
| BXA34-PST | Exit sign box 1.5W 34m viewing distance Self Test PST | Programmable Self-Test (PST) | PRC | | |
| BXA-D | Exit sign metal box DOWN ARROW legend | - | - | 0°C ~ 40°C | 0.14 kg |
| BXA-R | Exit sign metal box RIGHT ARROW legend | - | - | | |
| BXA-L | Exit sign metal box LEFT ARROW legend | - | - | | |

* Advance Remote Control (ARC) allows the accredited installer to carry out functional tests and/or full duration tests at any time and to check system's status. Please refer to ARC's user guide. In addition to ARC functions the Programmable Remote Control (PRC) allows the accredited installer to programme the testing schedule of each emergency luminaire. Please refer to PRC's user guide.

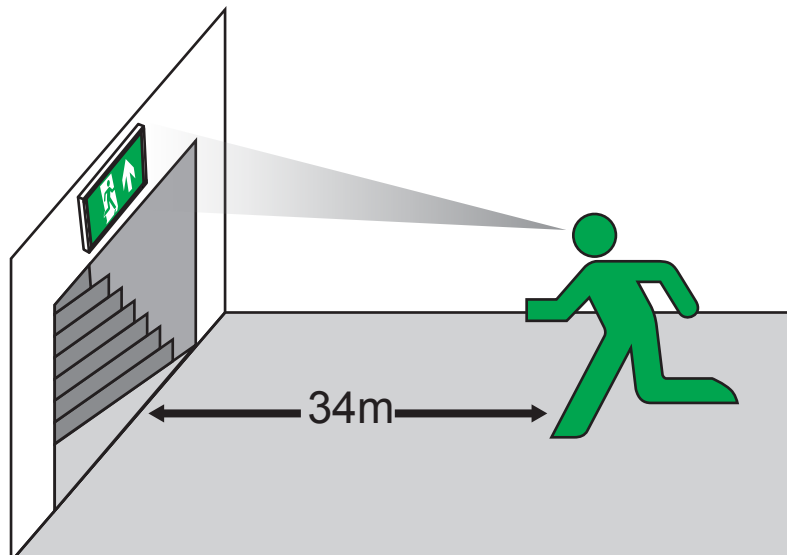



SAFETY

SPEEDY Emergency Exit Sign Box

| Technical information | |
|-----------------------------|--|
| Input voltage/frequency | 220-240V AC 50Hz |
| Power consumption | |
| Maintained | 5W(Max.*), 3W |
| Non-maintained | 3W(Max.*), 0.5W(standby) |
| LEDs Lifetime (L-70) | 50,000h |
| Viewing distance | 34m |
| Discharge duration | 3hr |
| Wh (maintained standby) | 3 |
| Wh (non-maintained standby) | 0.5 |
| Charge duration | up to 8hrs (first charge up to 16hrs) |
| Test facility | SD, AST, PST |
| IP rating | IP20 |
| IK rating | IK07 |
| Insulation class | I |
| Operation temp. | 0~40°C |
| Storage temp. | 0~50°C |

| Light Source | |
|--------------|-----------|
| Brand | Everlight |
| Quantity | 24 pcs |
| CCT | 5700K |
| CRI | >80 |

* Power consumption only during charging mode

INSTALLATION NOTES

- Wall mount
- BESA entry template on rear
- Cable entry to sides, top and rear (20mm cut-outs)
- Terminal block takes wires up to 4 x 1.5mm²

TESTING FACILITIES

| | |
|------------------------------|---|
| SD (Standard) | Functional and full duration tests must be initiated and carried out manually according to BS EN 50172:2004. This luminaire has an integrated test button for quick functional test. |
| AST (Advanced Self-Test) | This is a self-test luminaire. Functional test is carried out automatically once a week and runs for 30 seconds. Full duration test is carried out automatically every 52 weeks. First full duration test is carried out automatically within the first 4 weeks after the luminaire being connected to mains voltage. This luminaire can be used in conjunction with the Advanced Remote Control (ARC). ARC is an optional tool that adds extra features to AST emergency luminaires. Please refer to the ARC's user guide. |
| PST (Programmable Self-Test) | This is a programmable self-test luminaire. It must be used in conjunction with a Programmable Remote Control (PRC). Please refer to PRC's user guide. |

| Materials | |
|--------------------|---------------------|
| Luminaire housing | Steel |
| Luminaire diffuser | Polycarbonate |
| Luminaire bracket | N.A. |
| Luminaire legend | Polycarbonate |
| Luminaire screws | Zincd Steel |
| Finish | Matt |
| Colour | White |
| Battery type | Li-Ion 3.6V 2500mAh |

| Logistic information | |
|---------------------------------------|-------------------------|
| Product dimensions (L x W x D)mm | 392.6 x 41.2 x 196.2 mm |
| Product Net weight (Kg) | 1.08 Kg |
| Box dimensions (L x W x D)mm | 410 x 205 x 45 mm |
| Gross weight (Kg) | 1.25 Kg |
| Quantity of outer carton | 12 pcs |
| Outer carton dimensions(L x W x D)mm | 424 x 280 x 427 mm |
| Outer carton gross weight (Kg) | 15.5 Kg |
| Quantity per Euro pallet (1200 x 800) | 288 pcs |
| Pallet weight (Kg) | 10 Kg |

| Certification | |
|-----------------|------------------|
| Safety standard | BS EN 60598-2-22 |
| Certified by | LIA |
| CE mark | Yes |
| Factory QMS | ISO9001 |